




Picture IKL1-3x12 RS422


## **R&R Industrial keyboard IKL1-3x12 – for harsh environment**

housing	19 inch rack mount assembly 2 module heights Aluminium anodized, black or silver
Layout	3 x 12 push buttons
grid	35mm x 25mm
Key cap	R&R illuminated push buttons 30mm x 20mm Polycarbonat colourless, red, yellow or green UV – stabilized
illumination	Mikro light bulb T1 luminous intensity control or RGB LED
Switch	DNR 7467 Travel 1,5 mm Actuation fore 2 N Clear actuation point
Enscription	Symbol label
lifetime	Approx. > 2 millionen strokes

IKL1-3x12-01  
dimensions


19 inch front panel, 2 x module heights  
(H x B x T ) 88,1 x 483 x 40 mm

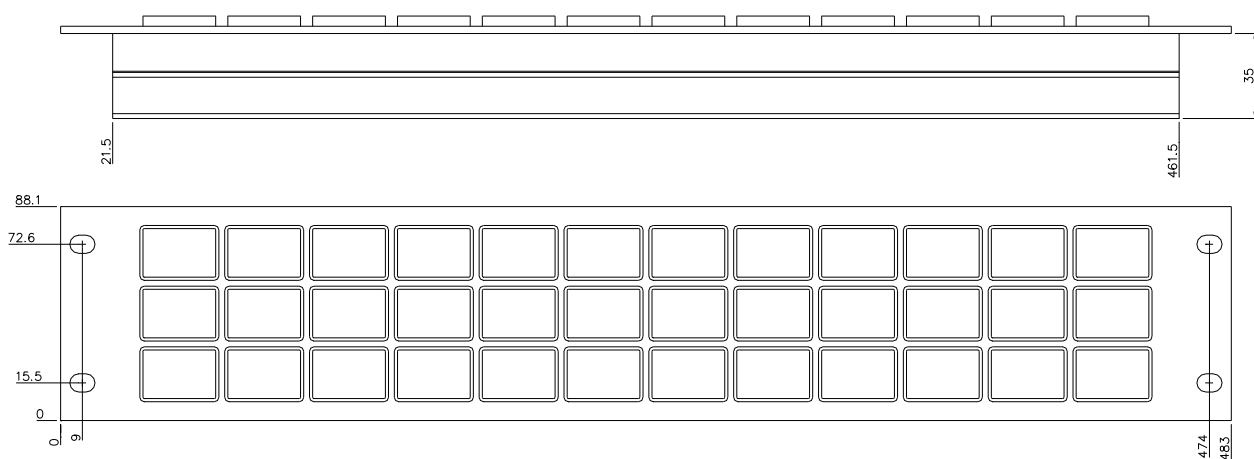

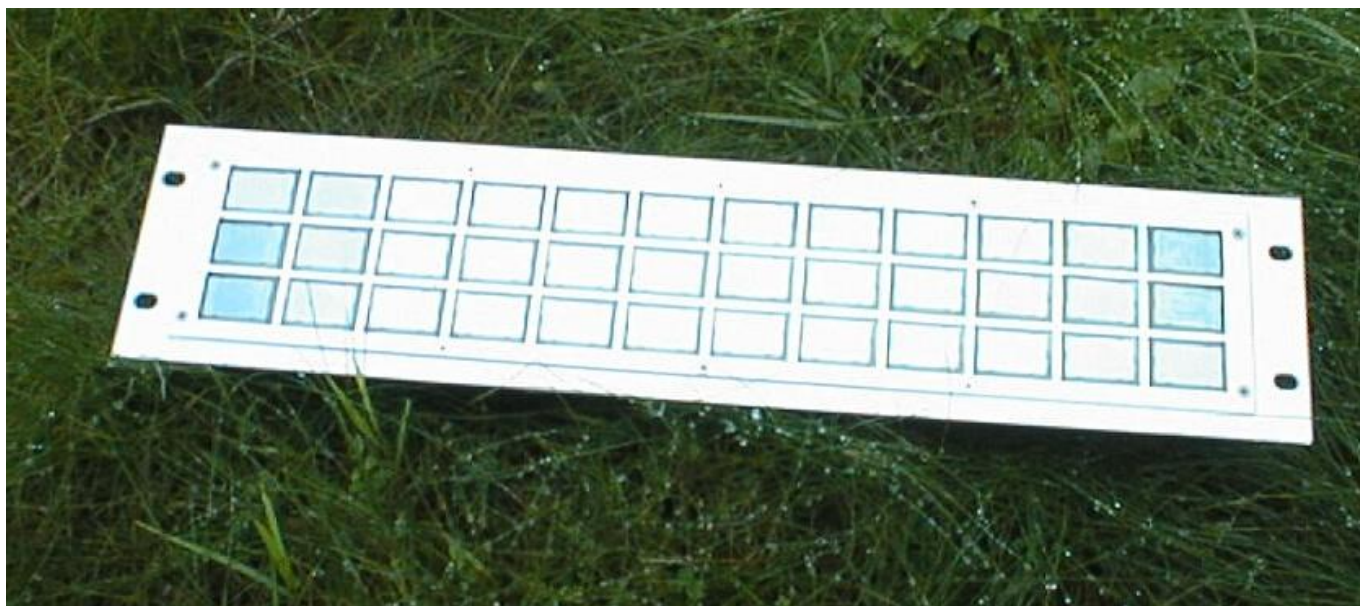

IKL1-3x12-02

Mounting from behind

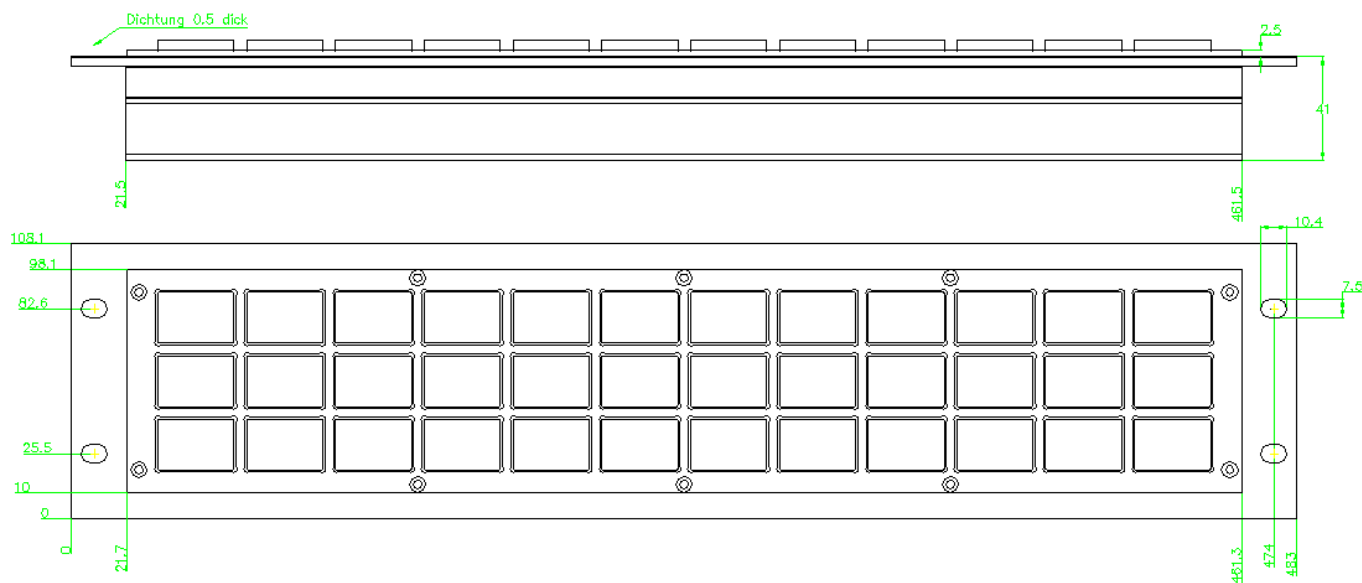

Controller	8bit $\mu$ Controller with E <sup>2</sup> Prom and watchdog Tastenparameter und Tastenbelegung über Schnittstelle parametrierbar
interface	1 x RS232C, RS 485, or RS422 Adjustable parameter DSUB 15 pin male R&R Bus see DNR 8089
optional interfaces	Ethernet, Profibus-DP, Interbus-S
Power supply	24 V DC